


**PRINT ORDER FORM - BELLOWS SEAL BOOTS**

Mail or Fax to: GARDAN MANUFACTURING CO., Inc.  
P.O. Box 34, New Castle, PA 16103  
Fax: 724-652-8210

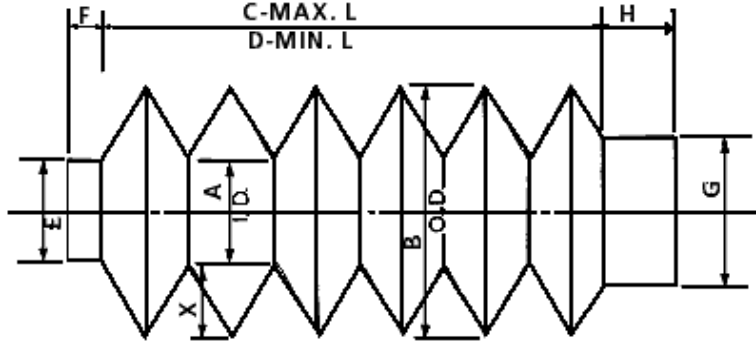

Company: \_\_\_\_\_

Date: \_\_\_\_\_

Street: \_\_\_\_\_

Please Note If You Require Quotation Only: \_\_\_\_\_

City, State, Zip: \_\_\_\_\_

Quantity: \_\_\_\_\_

Phone/Fax: \_\_\_\_\_

Your Order No.: \_\_\_\_\_

Attention of: \_\_\_\_\_

Dwg. No. \_\_\_\_\_

A-Inside Diameter: \_\_\_\_\_

\*F-Length end sleeves \_\_\_\_\_

B-Outside Diameter: \_\_\_\_\_

\*G-Inside dia. opposite sleeve \_\_\_\_\_

C-Max. Length not including sleeves \_\_\_\_\_

\*H-Length opposite sleeve \_\_\_\_\_

D.-Min. Length not including sleeves \_\_\_\_\_

\*Omit E, F, G and H if Sleeves are not needed.

\*E-Inside Dia. end sleeves \_\_\_\_\_

\*Vents by request, specify amount needed.


X-1-1/2" Standard Flange width, 3/4" Minimum

ALL SLEEVES AND PLIABLE PARTS available in round, square, rectangular, horizontal and triangular shapes. All may be used in angular, horizontal and vertical positions.

INDICATE TYPE OF SERVICE:

DIRT     DUST     OIL     SAND     COOLANT     OTHER     TEMP. RANGE

METHODS OF ATTACHMENT:

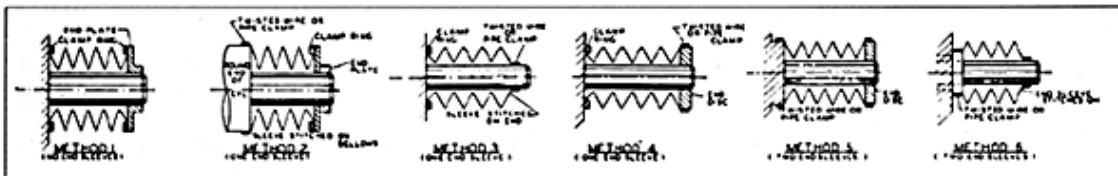

If you have trouble reading, contact Gardan for information regarding Methods of Attachment